


TSP43


HEALTHCARE SERIES/CONTROLS

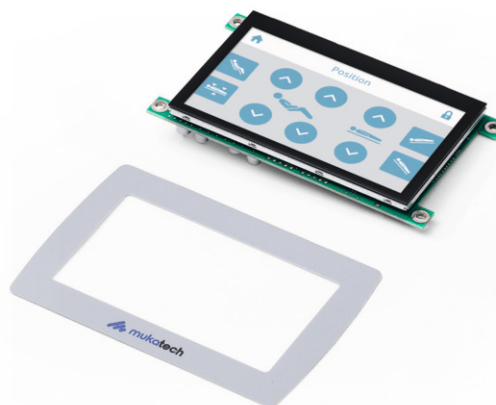

GENERAL FEATURES

Number of Keys	4,3-inch capacitive touch screen
Actuator Control Capacity	max. 5
IP Code	IPX6
Housing colour	RAL7035
Operating Temperature	+5°C to +40°C
Storage Temperature	-10°C to +50°C
Software	MsBus
Function LED	No
Power Supply	With cable in Control Boxes

DIMENSION DRAWING

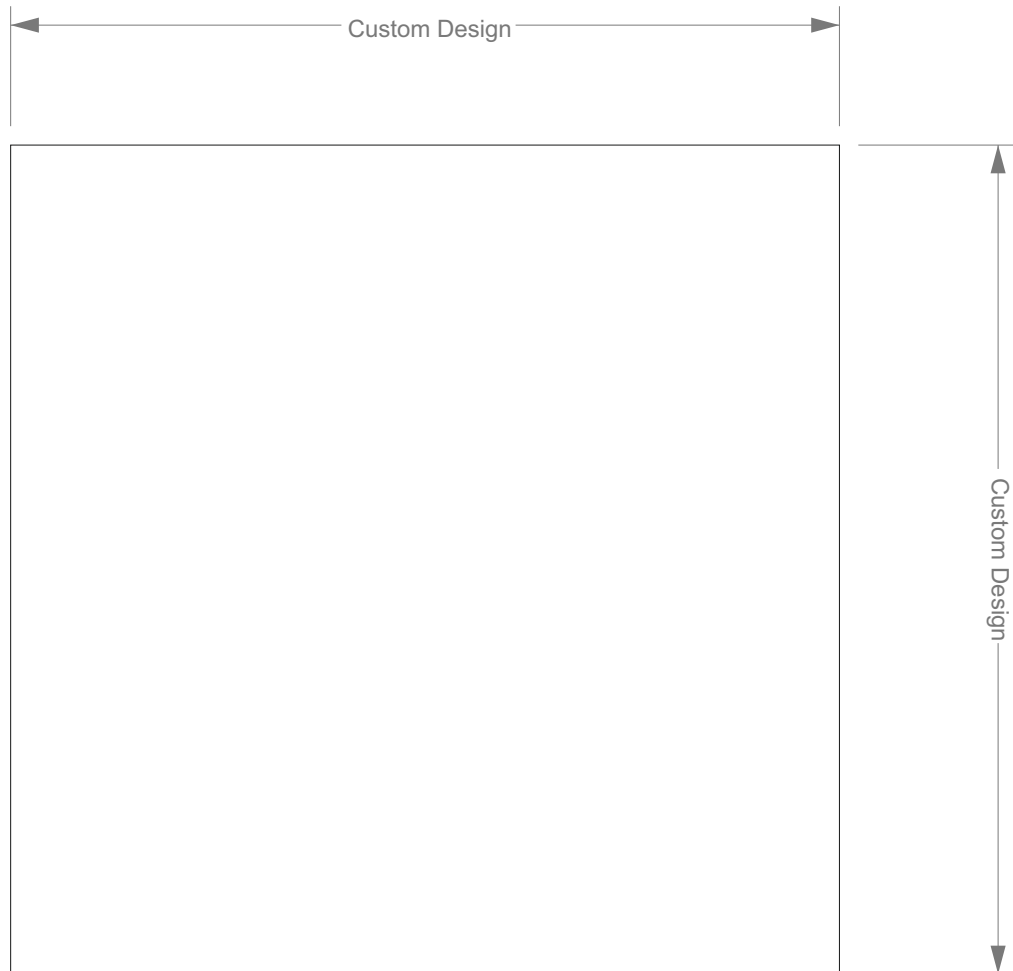

- It can be designed in all dimensions.

ORDERING KEY

		TSP
System Architecture	M: MsBus	M
Software Code	02: Standard Software Code XX: Special Software Code The code documentation will be shared with our customers.	02
IP Degree	6: IPX6	6
Not used	00: None	00
Membrane Item Number	XX: Last 2 digits of frontcover item number The membrane documentation will be shared with our customers.	01
Not used	0: None	0
Housing Colour	1: RAL7035	1
Cable	+ : Internal Cable	+
Cable Type	2: Flat Cable	2
Connector	5: Modular Jack 10P6C 180° plug 6: Modular Jack 10P6C 90° plug	5
Cable Length	7: 2300mm	7


Ordering example: TSPM026000101+257

SYSTEM COMPATIBILITY

- If the cable connector is 180 degrees, then this system is applicable.

Compatible control box models
-MCU36
-MCU36B
-MCU36L
-MCU37

TSPM026000101+257





Actuator Inputs

Other compatible
all Controls

- If the cable connector is 90 degrees, then this system is applicable.

TSPM026000101+267

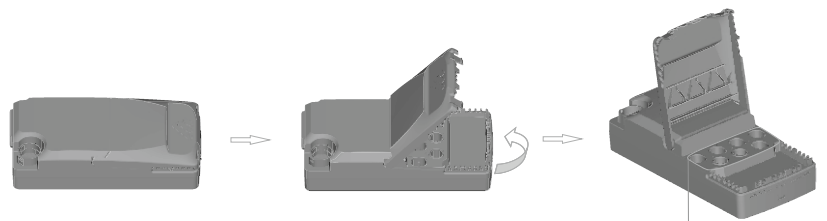

Compatible control
box models
-MC74
-MC84
-MC86

Actuator Inputs



Battery
Input

Other compatible
all Controls

Terms of Use

The user is responsible for determining the suitability of MUKATECH products for a specific application. MUKATECH products are subject to change without prior notice.

Document Revision Information

MUKATECH 20241104 DT.REV00